

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

Item n° :

60122626

Model :

DIVERTRON 1200 M

Pump data

Pressure rating :

Min. fluid temperature : 0 °C

Max. fluid temperature : 35 °C

Max. Ambient temperature :

Requested data

Flow :

Head :

Fluid : Water

Fluid Temperature : 20 °C

Density : 998,3 kg/m³

Kinematic viscosity : 1,005 mm²/s

Vapor pressure : 2,34 kPa

Hydraulic data (duty point)



Flow :

Head :

Materials

Pump body	Technopolymer
Impeller	Technopolymer
Diffuser	Technopolymer
OR ring	NBR
Suction filter	Stainless Steel AISI 304
Motor shaft	AISI 416
Motor casing	Aluminium

Curve tolerance according to ISO 9906

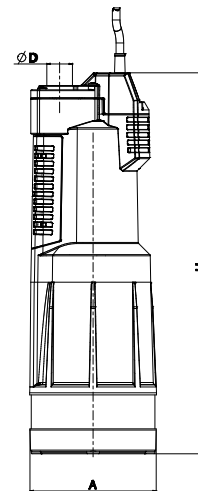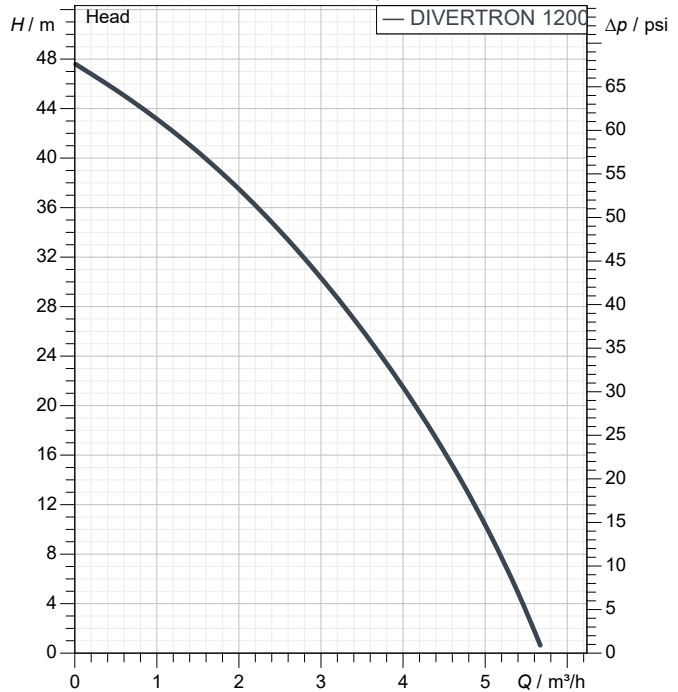

Motor data

Motor brand :	DAB	
Nominal power P2 :	0,75 kW	
Rated voltage :	1~ 220-240 V	50 Hz
Nominal current :	4,8 A	
Number of poles :	2	
Rated speed :	2.800 1/min	
Degree of protection :	IP 68	

Weight : 11 kg

Dimensions in mm

A	150				
D	30				
H	480				

Pump connection

Suction side :	/
Discharge side :	1" G-F / --



PERFORMANCE CURVES

2021-10-21

Page 2 / 3

DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com


Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON 1200 M

Curve tolerance according to ISO 9906

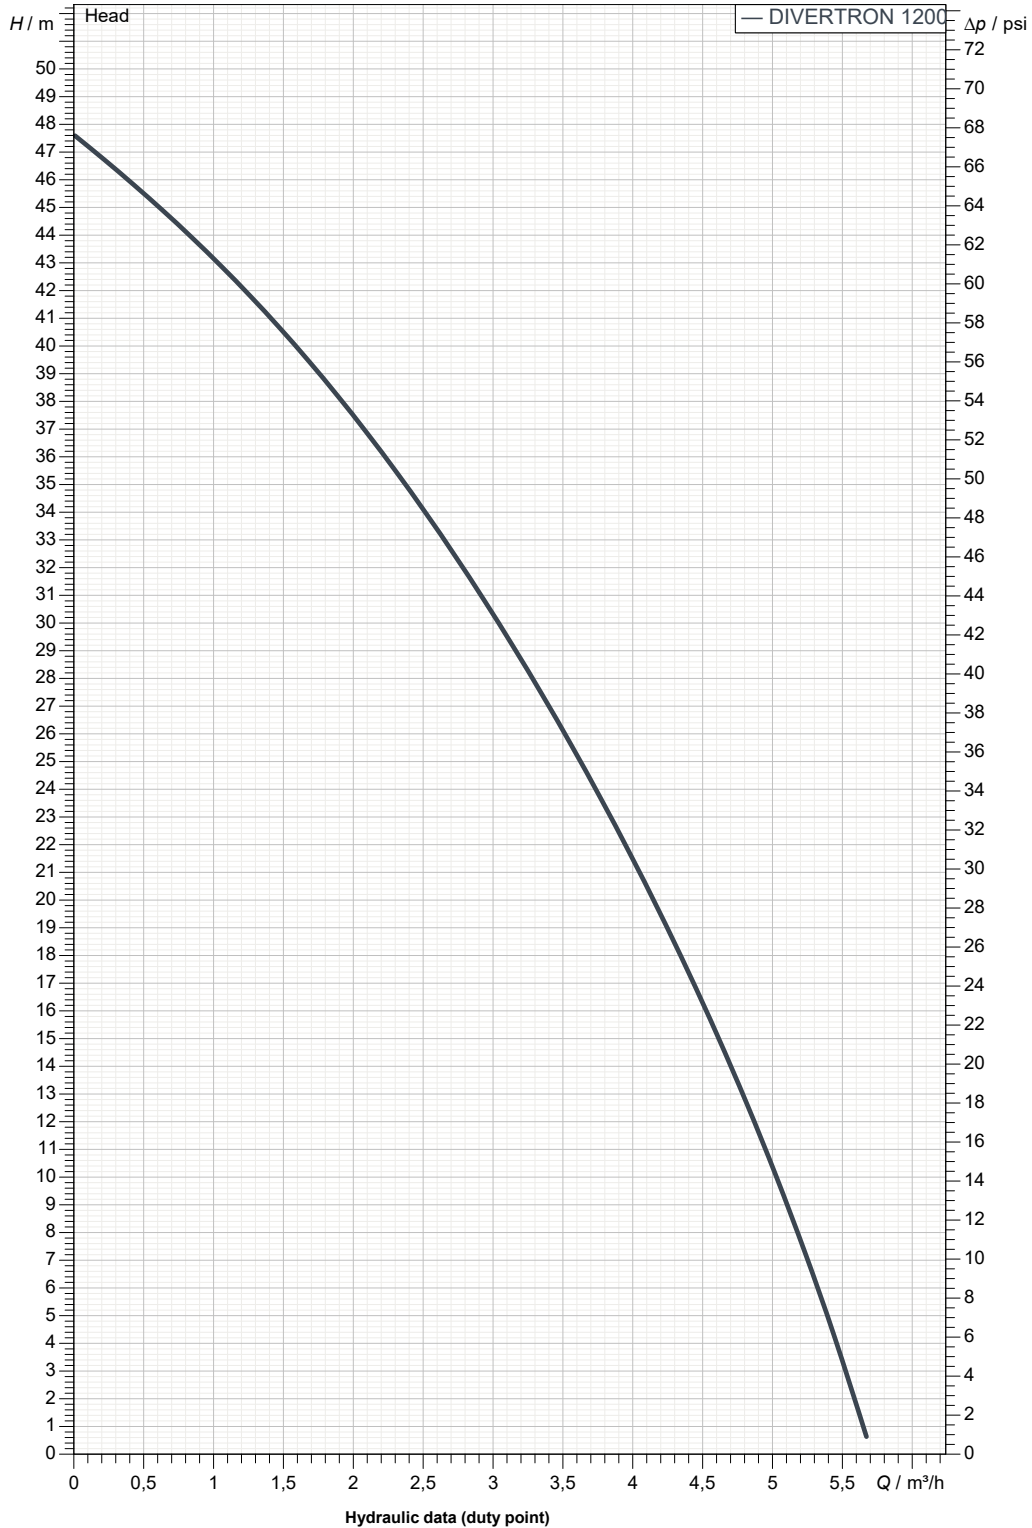

Suction side :

Discharge side :
1" G-F
--

Flow :

Head :

Rated speed :
2.800 1/min

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER_

ISSUE_DATE
2021-10-21



DIMENSIONAL DRAWING

2021-10-21

Page 3 / 3


DAB PUMPS S.p.A.
Via Marco Polo, 14 - 35035 Mestrino (PD), Italy
Tel. +39 049 5125000 - Fax +39 049 5125950
www.dabpumps.com

Receiver

From

Society
Reference
Address
Phone
Fax
E-mail

DIVERTRON 1200 M

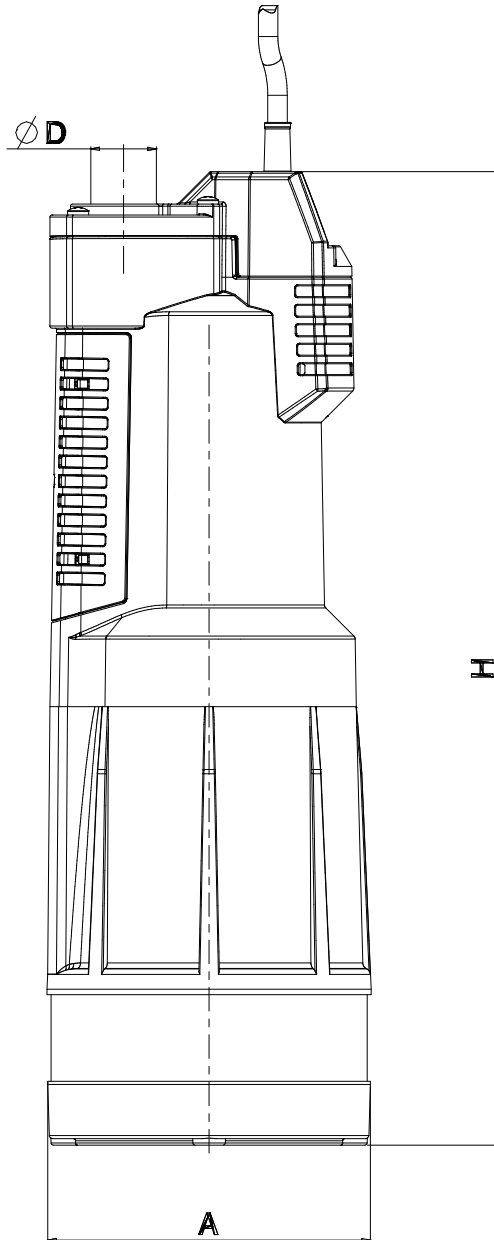

Dimensions in mm

Pump connection

1	A	150					
2	D	30					Suction
3	H	480					
4							
5							
6							
7							Discharge
8							1" G-F
9							--
10							
11							
12							

MAIN_PROJECT_TITLE

BUSINESS_PROCESS_ID

OWNER

ISSUE_DATE

2021-10-21